



Dimensions

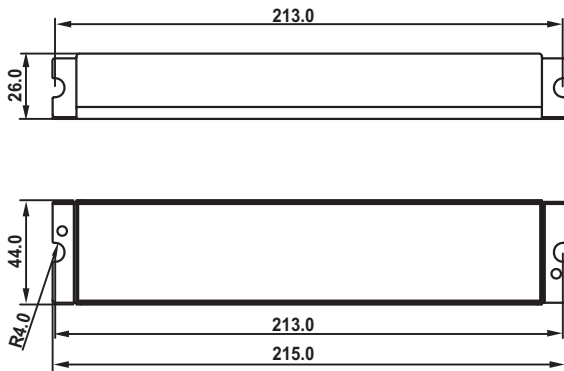

Wiring Diagram

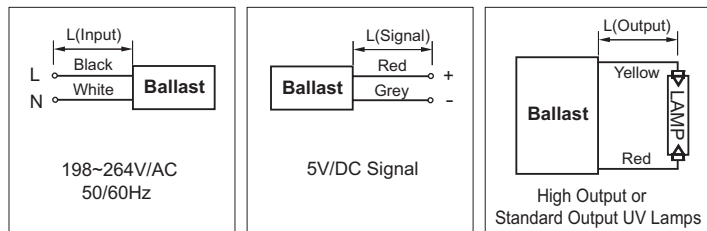

Features & Functions

- Instant Start
  - Constant Current Output
  - Limiting Lamp Power
  - Lamp Open Protection
  - Lamp Fault Protection
  - Status Indication / Remote
  - DC 5V Signal / Optional
- Lamp on: Max.5V/DC Max.5mA, Lamp fault: 0V

Ordering Information

Type	Quantity [pcs]			Weight [kg]			Size [m <sup>3</sup> ]			Article No.
	A	B	C	A	B	C	B	C		
L(Input)=430mm, L(Output)=630mm, L(Signal)=630mm										
RL1-425-90	8	32	1536	2.82	11.96	586	0.022	1.36	86 00 0121 01	
RL1-800-100	8	32	1536	2.92	12.36	605	0.022	1.36	86 00 0121 02	
L(Input)=430mm, L(Output)=450mm, L(Signal)=450mm										
RL1-425-90	8	32	1536	2.81	11.64	571	0.022	1.36	86 90 0121 01	
RL1-800-100	8	32	1536	2.91	12.04	590	0.022	1.36	86 90 0121 02	
L(Input)=100mm, L(Output)=100mm, L(Signal)=100mm										
RL1-425-90	8	32	1536	2.62	11.16	548	0.022	1.36	86 30 0121 01	
RL1-800-100	8	32	1536	2.72	11.56	567	0.022	1.36	86 30 0121 02	
L(Input)=300mm, L(Output)=300mm, L(Signal)=300mm										
RL1-425-90	8	32	1536	2.78	11.80	578	0.022	1.36	86 40 0121 01	
RL1-800-100	8	32	1536	2.88	12.20	597	0.022	1.36	86 40 0121 02	
L(Input)=1.5m, L(Output)=1.5m, L(Signal)=1.5m										
RL1-425-90	8	32	1536	3.27	13.75	673	0.031	1.42	86 70 0121 01	
RL1-800-100	8	32	1536	3.37	14.15	692	0.031	1.42	86 70 0121 02	
L(Input)=60mm, L(Output)=60mm										
RL1-425-90	8	32	1536	2.62	11.16	548	0.022	1.36	87 10 0121 01	
RL1-800-100	8	32	1536	2.72	11.56	567	0.022	1.36	87 10 0121 02	
L(Input)=1.0m, L(Output)=1.0m										
RL1-425-90	8	32	1536	2.96	12.53	614	0.022	1.36	87 80 0121 01	
RL1-800-100	8	32	1536	3.06	12.93	633	0.022	1.36	87 80 0121 02	
L(Input)=2.0m, L(Output)=2.0m										
RL1-425-90	8	32	1536	3.31	13.91	680	0.031	1.42	87 60 0121 01	
RL1-800-100	8	32	1536	3.41	14.31	699	0.031	1.42	87 60 0121 02	

Note: (A: Small box. B: Carton. C: Pallet.)



RL1-425-90

AC Source :	198~264V	Lamp Power :	40~79W
Mains Frequency :	47~63Hz	Output Current :	0.39~0.43A typ.
Input Power :	42~81W	Output Frequency :	36KHz
Input Current :	Max.0.40A at 230Vrms	Efficiency :	98% Max. load
Power Factor :	0.90 typ.		
Lamp Type :	GPH843T5 GPH1148T5 GPH1154T5 GPH1630T5 G48T5 G64T5 G67T5 TUV64T5		

RL1-800-100

AC Source :	198~264V	Lamp Power :	40~100W
Mains Frequency :	47~63Hz	Output Current :	0.70~0.80A typ.
Input Power :	43~103W	Output Frequency :	39KHz
Input Current :	Max.0.50A at 230Vrms	Efficiency :	97% Max. load
Power Factor :	0.90 typ.		
Lamp Type :	GPH436T5HO GPH846T5HO GPH893T5HO GHO36T5 TL80W TL100W TUV25W TUV36T5HO TUV55WHO TUV75WHO PL-L35WHO PL-L60WHO PL-L95WHO		