



# Actinic BL TL(-K)/TL-D(-K)

## Actinic BL TL TL 8W/10 1FM/10X25CC

With an optimized spectrum matching the eye sensitivity of the housefly, Actinic BL TL(-K)/TL-D(-K)/TL-E/PL-S and PL-L lamps are perfect for attracting insects. They have virtually no UV-B output, and so are perfectly safe. What's more, with the lowest mercury content in the industry and being 100% lead-free, these lamps represent a very good environmental choice. Furthermore, the availability of a wide range of form factors (straight (T5, T8, T12), circular (TL-E) and compact (PL-S/PL-L)) and wattages enables you to make all kinds of designs for your electronic fly killers.

### Product data

General Information		Operating and Electrical	
Cap-Base	G5 [ G5]	Power (Rated) (Nom)	7.1 W
Main Application	Reprography (R)	Lamp Current (Nom)	0.145 A
Life To 50% Failures (Nom)	10000 h	Voltage (Nom)	56 V
Useful Life (Nom)	5000 h		
Light Technical		Approval and Application	
Color Code	10	Mercury (Hg) Content (Nom)	4.4 mg
Color Designation	Actinic		
Chromaticity Coordinate X (Nom)	222	UV	
Chromaticity Coordinate Y (Nom)	210	UV-B/UV-A (IEC)	0.2 %
Depreciation At 500 Hours	17 %	UV-A Radiation 100Hr (IEC)	1.60 W
Depreciation At 1000 Hours	25 %		
LLMF 2000 h Rated	35 %	Product Data	
		Full product code	871150026042027
		Order product name	Actinic BL TL TL 8W/10 1FM/10X25CC
		EAN/UPC - Product	8711500260420

## Actinic BL TL(-K)/TL-D(-K)

Order code	928001001030
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	250
Material Nr. (12NC)	928001001030


Net Weight (Piece)	25.300 g
--------------------	----------

### Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.



### Dimensional drawing

Product	D (max)	A (max)	B (max)	B (min)	C (max)
Actinic BL TL TL 8W/10 1FM/10X25CC	16 mm	288.3 mm	295.4 mm	293 mm	302.5 mm



#### TL 8W/10

### Photometric data

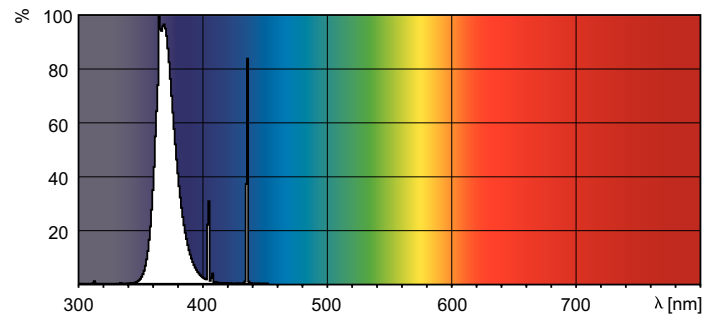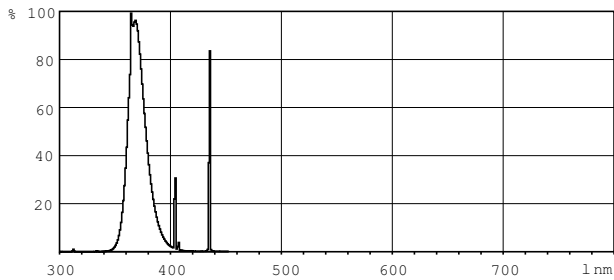

#### Lightcolor /10

#### Lightcolor /10

