



Type	Cap-Base	Dim. no	Technical Lamp Wattage (W)	Lamp Voltage (V)	UVC at 100h (W)	Lamp Current (A)	Useful life (h)	Depreciation at useful lifetime (%)	Packaging type	Packaging configuration	Ordering number 12 NC
4W	G5	1	4	29	0.9	0.17	6000	20	1FM	10x25BOX	928000104013
6W	G5	2	6	42	1.5	0.16	9000	20	1FM	10x25BOX	928000704013
8W	G5	3	8	56	2.4	0.15	11000	15	1FM	10x25BOX	928001104013
11W	G5	2	11	26	2.6	0.43	11000	15	1FM	10x25BOX	928002204013
16W	G5	4	15	43	4.0	0.40	11000	15	1FM	10x25BOX	928002004013
20W	G5	5	20	45	6.0	0.45	11000	15	1FM	10x25BOX	928003404013
25W	G5	6	25	55	7.2	0.45	5000	15	1FM	10x25BOX	928002604013
6W 4P SE	4 Pins Single Ended	7	6	42	1.7	0.16	9000	20	UNP	32	927971604099
11W 4P SE	4 Pins Single Ended	8	11	26	2.6	0.43	9000	15	UNP	32	927971204099
16W 4P SE	4 Pins Single Ended	9	15	43	4.0	0.40	9000	15	UNP	32	927971404099
20W 4P SE	4 Pins Single Ended	10	20	45	6.0	0.45	11000	15	UNP	32	927973404099
25W 4P SE	4 Pins Single Ended	11	25	55	8.0	0.45	9000	20	UNP	32	927972204099

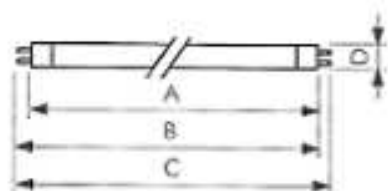

G5

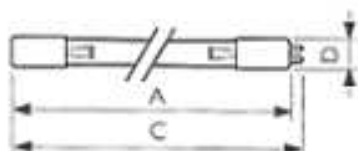

4 Pins Single Ended

Dim. no.	A max.	B min.	B max.	C max.	D max.
1	135.9	140.6	143.0	150.1	16
2	212.1	216.8	219.2	226.3	16
3	283.3	293.0	295.4	302.5	16
4	283.3	293.0	295.4	302.5	16
5	398.0	402.7	405.1	412.2	16
6	516.9	521.6	524.0	531.1	16

Dim. no.	A max.	C max.	D max.
7	244.1	251.8	19
8	244.1	251.8	19
9	320.3	328.0	19
10	430.0	437.7	19
11	548.9	556.6	19

* Dimensions (mm)